



X-Lite Softphone Installation

1. Run the X-Lite setup program.

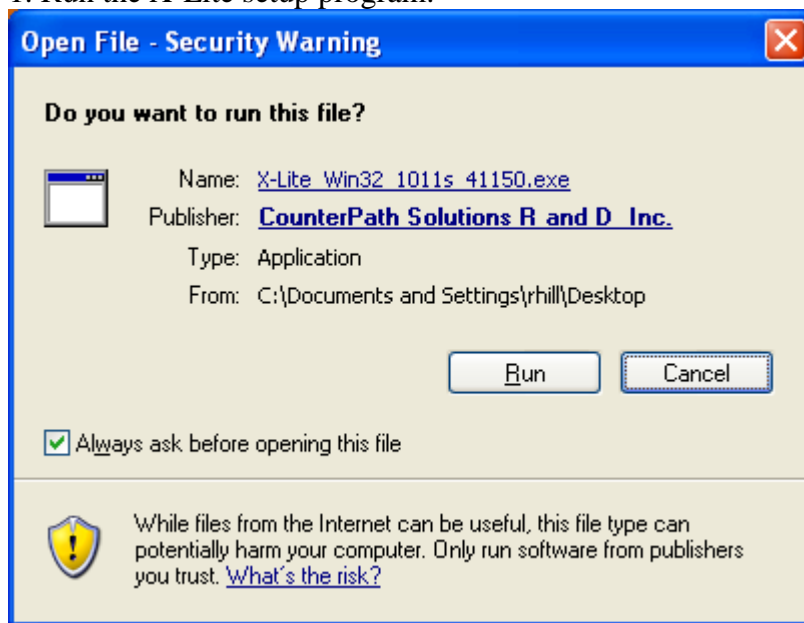


2. Click Next.

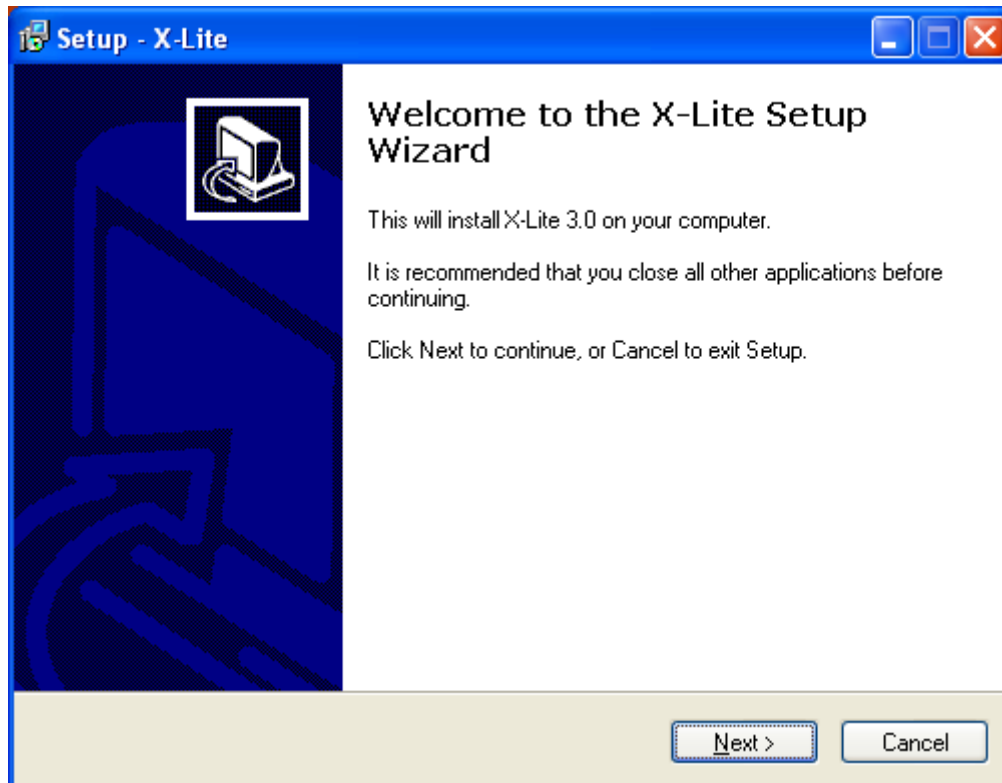


3. Accept the agreement and click Next.




4. Accept the default installation location and click Next.

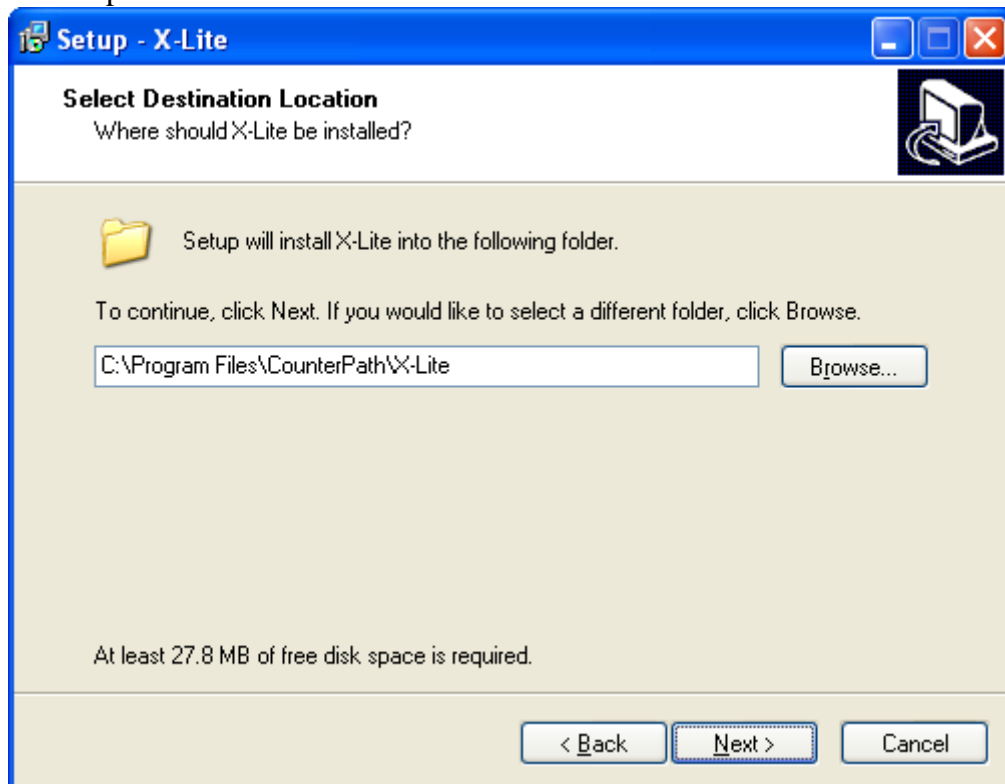

5. Select your required installation options and click Next. X-Lite will now install.

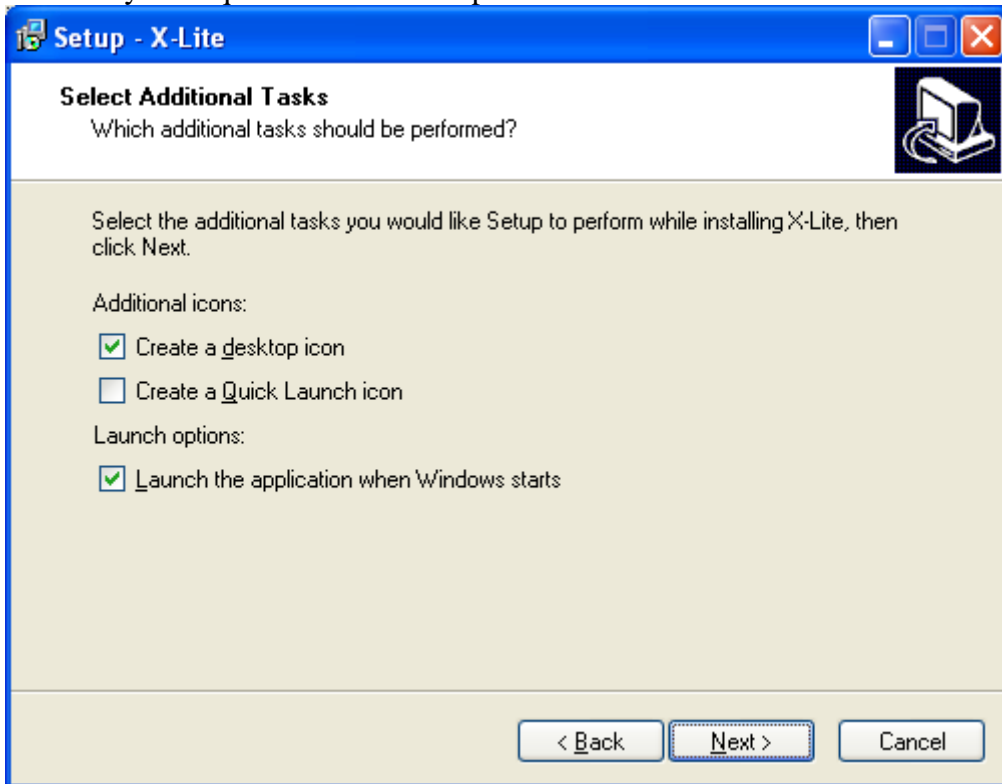

5. Click Finish.

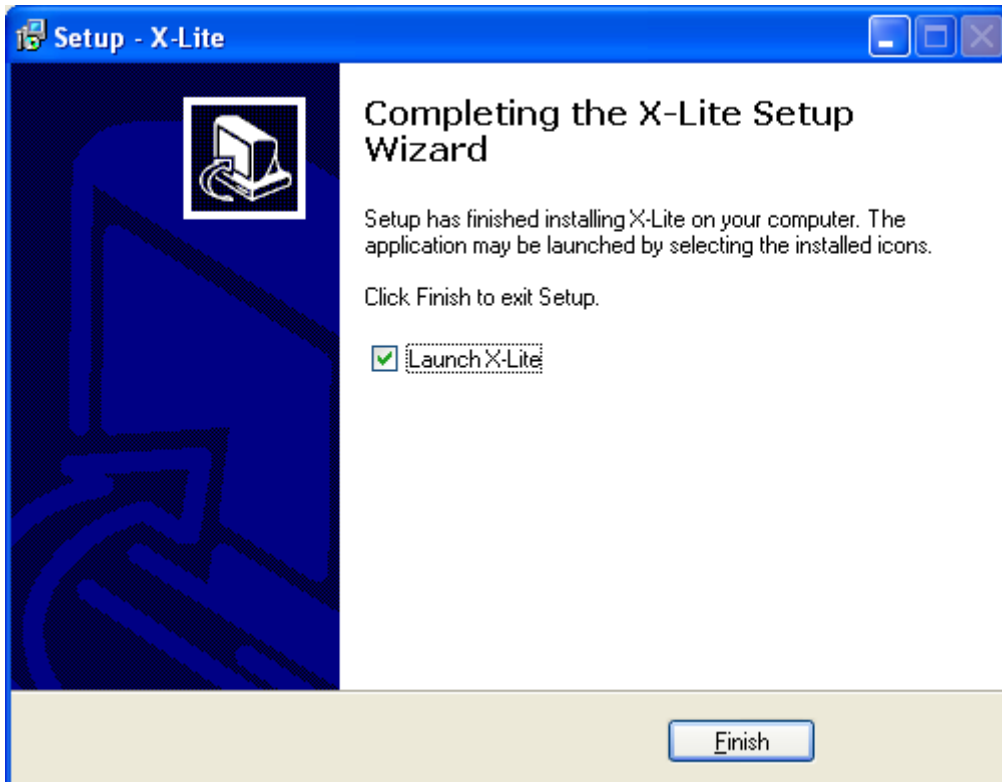

8. Enter your name in the “Display Name” textbox. In “User name” enter your extension number. Enter the Password that was assigned to you. Under “Authorization user name” enter your extension number. Under “Domain” enter the IP address or DNS host name of the SIPWorks PBX. Leave all other options as they are. Now click the Voicemail tab.

The screenshot shows the 'Properties of Account1' dialog box with the 'Voicemail' tab selected. The 'User Details' section contains the following fields:

| | |
|-------------------------|-----------------|
| Display Name | John Doe |
| User name | 300 |
| Password | •••••••• |
| Authorization user name | 300 |
| Domain | 208.124.196.111 |

The 'Domain Proxy' section includes a checked checkbox for 'Register with domain and receive incoming calls'. Below this, the 'Send outbound via:' section has three radio button options: 'domain', 'proxy' (with an adjacent 'Address' field), and 'target domain' (which is selected).

The 'Dialing plan' field at the bottom contains the text: #1\a\a.T;match=1;prestrip=2;

At the bottom of the dialog are three buttons: 'OK', 'Cancel', and 'Apply'.


9. Ensure that “Check for voice mail” is selected. In “Number to dial for checking voicemail” enter *97. Leave all other options as they are and click OK.

The image shows a screenshot of a Windows-style dialog box titled "Properties of Account1". The dialog has a blue title bar with a close button (X) in the top right corner. Below the title bar are five tabs: "Account", "Voicemail", "Topology", "Presence", and "Advanced". The "Voicemail" tab is currently selected and highlighted in yellow. The main content area of the dialog is light gray and contains the following elements:

- A checked checkbox labeled "Check for voice mail".
- A text input field labeled "Number to dial for checking voicemail" containing the text "*97".
- A text input field labeled "Number for sending calls to voicemail" which is currently empty.
- An unchecked checkbox labeled "Send calls to voicemail if unanswered for" followed by a text input field containing "0" and the word "seconds".
- A section titled "Forwarding" in blue text, containing two unchecked checkboxes:
 - "Always forward to this address" followed by an empty text input field.
 - "Forward to this address when busy" followed by an empty text input field.

At the bottom of the dialog, there are three buttons: "OK", "Cancel", and "Apply".

10. Click on Close.

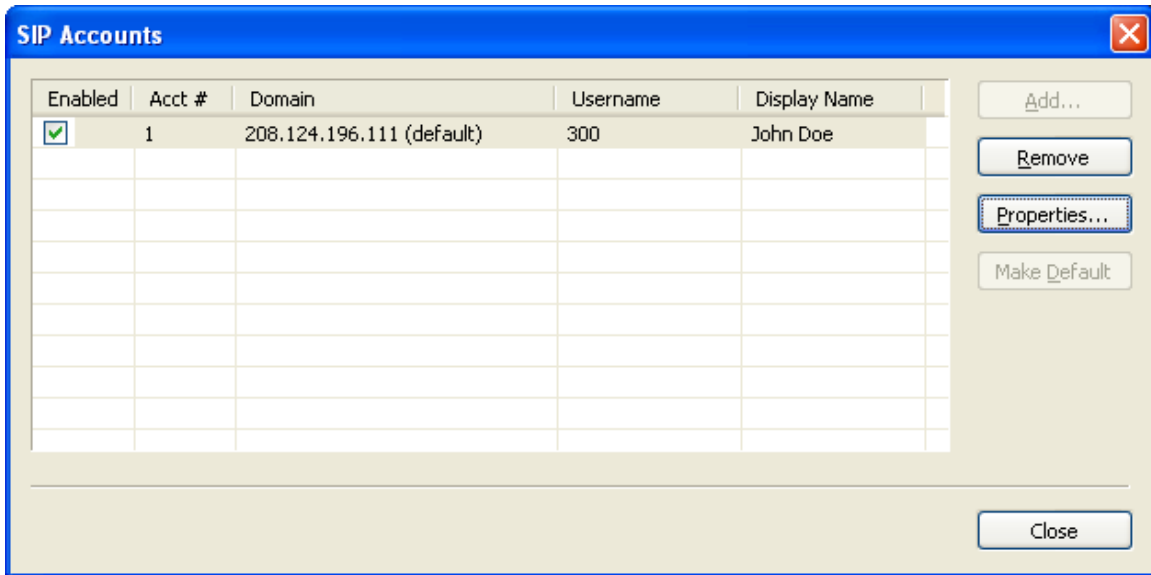

11. Your X-Lite softphone should now register to the SIPWorks host and show Ready.

